


NOTES:

- 1) MATERIAL:
  - 1-1 HOUSING:THERMOPLASTIC,UL 94V-0,COLOR:BLACK
  - 1-2 CONTACT:COPPER ALLOY
  - 1-3 SHELL:STAINLESS STEEL
- 2) FINISH:
  - 2-1 CONTACT:GOLD PLATING ON CONTACT AREA (SEE P/N DESCRIPTION)
  - 1u" MIN Au PLATING ON SOLDER AREA, 50u" MIN NICKEL UNDERPLATING OVER ALL
  - 2-2 SHELL:1u" MIN Au PLATING ON SOLDER AREA 50u" MIN NICKEL UNDERPLATING OVER ALL
- 3) PRODUCT SPECIFICATIONS:
  - 3-1 VOLTAGE RATING: 50V
  - 3-2 CURRENT RATING: 1.0A
  - 3-3 INSULATION RESISTANCE: 1000MEG.OHM MIN
  - 3-4 CONTACT RESISTANCE: 50 MILL.OHM MAX
  - 3-5 OPERATION TEMPERATURE: -20° TO +85°
  - 3-6 DURABILITY: 3000 CYCLES

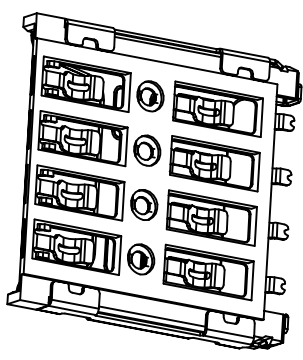

PIN No	DESCRIPTION
C1	VCC : SUPPLY VOLTAGE
C2	RST : RESET SIGNAL
C3	CLK : CLOCK SIGNAL
C4	RESERVED
C5	GND
C6	VPP : VARIABLE SUPPLY VOLTAGE
C7	I/O : SERIAL DATA INPUT/OUTPUT
C8	RESERVED

GENERAL TOLERANCE	DWG NO.	JYSA0602-001	APPD:	WIND	Scale	1:1
X.±0.45	X.±0.5	8PIN MICRO SIM CARD HI.50 (防烫PIN)	CHKD:		UNIT	mm
X.±0.35	X.±0.2		DR:			
.XX±0.25	.XX±0.1	Part NO.	Date	2016/11/29		
.XXX±0.15	.xxx±0.5	JYS-SIM150-126				
SHEET 1/1						

JYS 杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.