


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2019/10/31

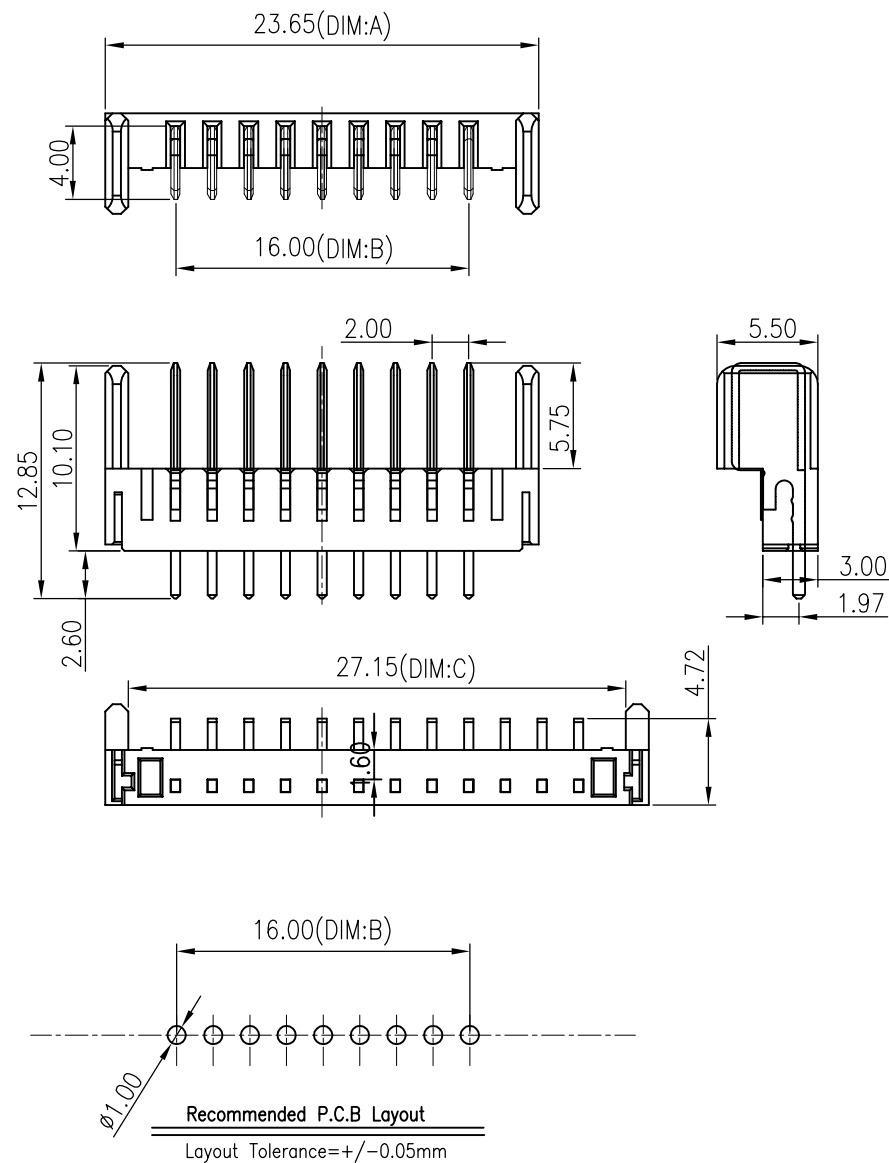

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	11.65	4.00	9.15	10.25
04	13.65	6.00	11.15	12.25
05	15.65	8.00	13.15	14.25
06	17.65	10.00	15.15	16.25
07	19.65	12.00	17.15	18.25
08	21.65	14.00	19.15	20.25
09	23.65	16.00	21.15	22.25
10	25.65	18.00	23.15	24.25
11	27.65	20.00	25.15	26.25
12	29.65	22.00	27.15	28.25

NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Current rating:5A

instant CURRENT:7A

Contact Resistance:30M Ω

Insulation Resistance:100M Ω

Dielectric Voltage:500V

Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

GENERAL TOLERANCE		DWG NO.	JYSA1014-03	APPD:	WIND	Scale	1:1
X. ± 0.45	x. $\pm 5^{\circ}$	Title	Battery 180 $^{\circ}$ 2.0mm Pitches Male Connector	CHKD:		UNIT	mm
.X ± 0.35	.x $\pm 2^{\circ}$			DR:			
.XX ± 0.25	.xx $\pm 1^{\circ}$	Part NO.	JYS-BY101-2XX	Date	2019/10/31		
.XXX ± 0.15	.xxx $\pm 0.5^{\circ}$						
SHEET	1/1			JYSCONN Shenzhen JYSCONN Electronics Co., LTD.			