
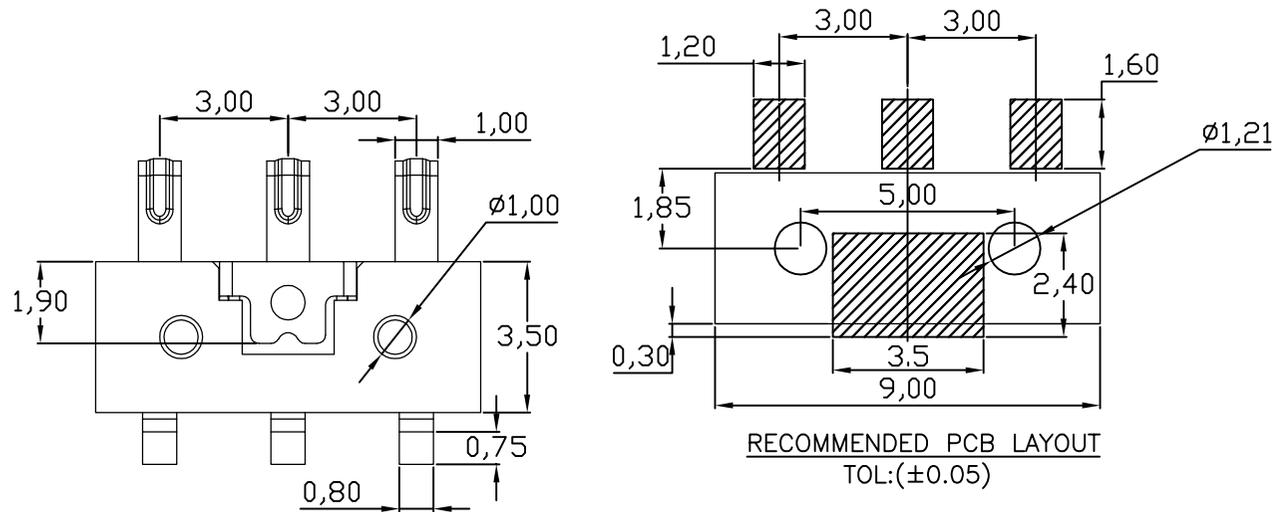
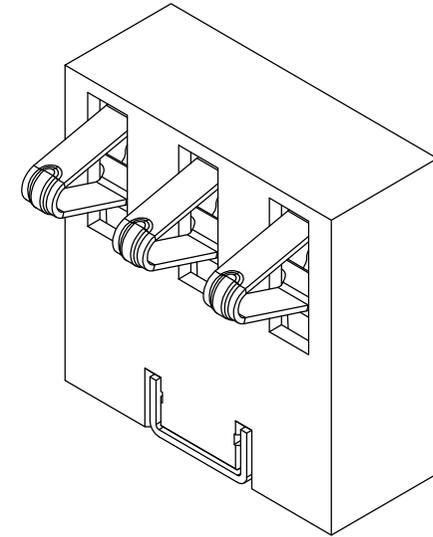


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2018/10/31

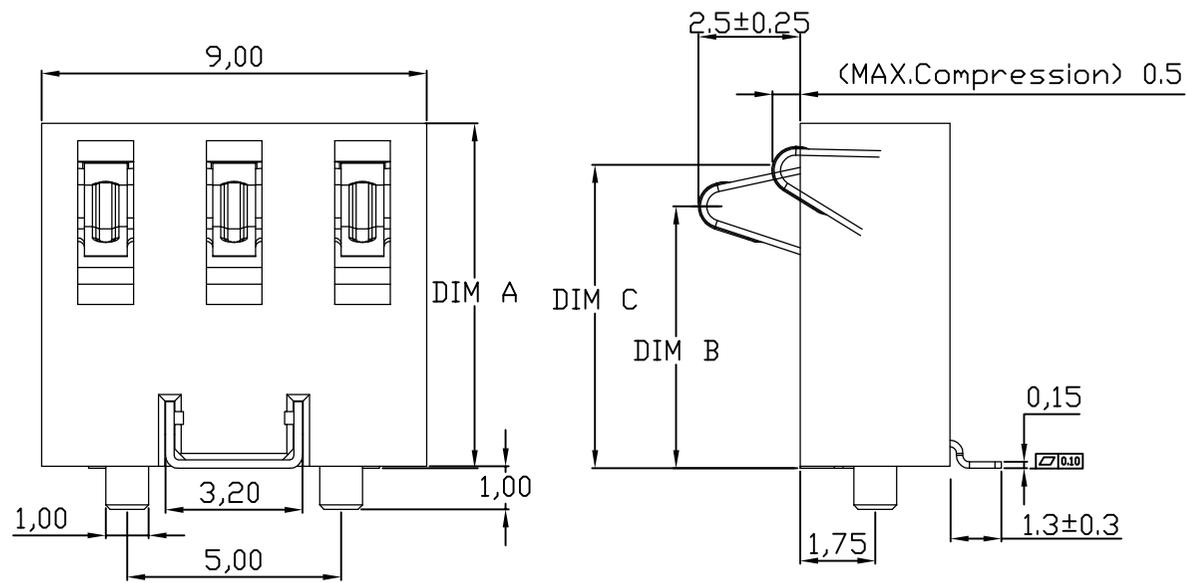

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

规格型号	DIM A	DIM B	DIM C	GENERAL TOLERANCE		DWG NO.	JYSA0405-04	APPD:	WIND	Scale	1:1	
				X.±0.45	x.±5'						UNIT	mm
JYS-BY800-227	8.0±0.15	5.9±0.3	6.9±0.3	X.±0.35	.x'±2'	Title	BATTERY 3PIN 3.00PITCH 8.00H-10.00H WITH POST	CHKD:	DR:	Date	2018/10/31	
JYS-BY900-228	9.0±0.15	6.9±0.3	7.9±0.3	.XX±0.25	.xx'±1'							
JYS-BY100-229	10.0±0.15	7.9±0.3	8.9±0.3	.XXX±0.15	.xxx'±0.5'							

JYSCONN Shenzhen
JYSCONN Electronics Co., LTD.